


GS50 | Glass and dishwasher

SKU: 6054

ADDITIONAL INFORMATION

Weight	65 kg
Dimensions	660 × 660 × 1010 mm
Brand	DIHR
Packaging dimension (Wi)	660
Packaging dimension (De)	660
Packaging dimension (He)	1010
External size (Wi)	590
External size (De)	600
External size (Hi)	850
Gross weight (kg)	6.5
Voltage (V/Hz)	400/50
Power (W)	5200
Water consumption per cycle (l)	2.3
Basket dimensions (mm)	500 x 500
Washing up efficiency (basket/hour)	30
Tank capacity (l)	29
Duration of the cycle (mp)	120/180
Maximal dish size (mm)	345
Net weight (kg)	57

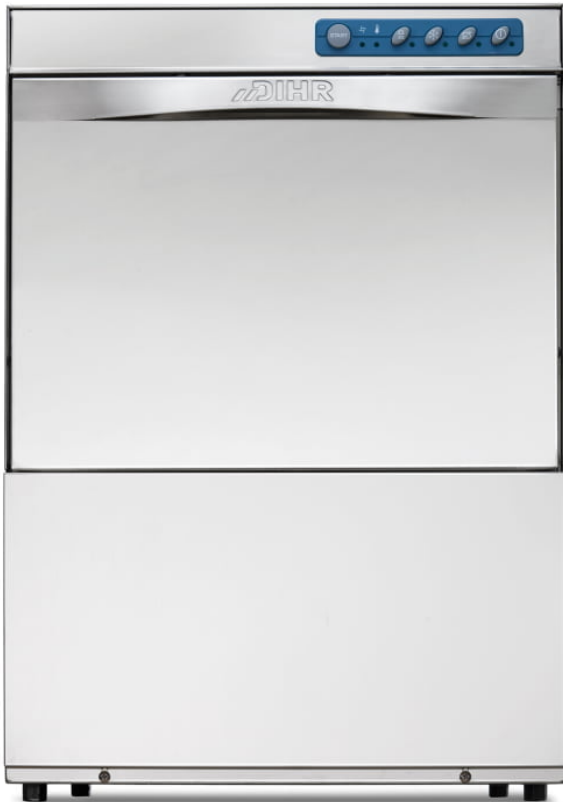

PRODUCT DESCRIPTION

The GS 50 single-walled dishwasher with AISI 304 stainless steel exterior and interior, heat- and sound-insulated double-walled door, LED panel, two speeds, opening sensor safety microswitch, deep-drawn basin (29.0 liters), integrated system of overflow and drain pipes for triple protection of the washing pump), non-return valve, built-in rinse aid dispenser, "Thermostop" system (rinsing only starts when the water in the boiler reaches 85 ° C), boiler capacity: 5.7 liters, electronically controlled, Sewage discharge pump without pump (with gravity discharge). Dishwasher max. Suitable for 320 mm high glasses and 345 mm diameter plates. Basket size: 500x500mm. Accessories: 2 baskets (for glasses and plates), 1 cutlery basket. The base unit is available in 400V / 50Hz, but is optionally available in 230V / 50Hz. The use of a water softener is mandatory!

ADDITIONAL INFORMATION

Weight	65 kg
Dimensions	660 × 660 × 1010 mm
Brand	DIHR
Packaging dimension (Wi)	660
Packaging dimension (De)	660
Packaging dimension (He)	1010
External size (Wi)	590
External size (De)	600
External size (Hi)	850
Gross weight (kg)	6.5
Voltage (V/Hz)	400/50
Power (W)	5200
Water consumption per cycle (l)	2.3
Basket dimensions (mm)	500 x 500
Washing up efficiency (basket/hour)	30
Tank capacity (l)	29
Duration of the cycle (mp)	120/180
Maximal dish size (mm)	345
Net weight (kg)	57

