


GS85 T | Glass and dishwasher

**SKU:** 6057

## **ADDITIONAL INFORMATION**

<b>Weight</b>	77 kg
<b>Dimensions</b>	690 × 670 × 1300 mm
<b>Brand</b>	<a href="#">DIHR</a>
<b>Packaging dimension (Wi)</b>	<a href="#">670</a>
<b>Packaging dimension (De)</b>	<a href="#">690</a>
<b>Packaging dimension (He)</b>	<a href="#">1300</a>
<b>External size (Wi)</b>	<a href="#">590</a>
<b>External size (De)</b>	<a href="#">600</a>
<b>External size (Hi)</b>	<a href="#">1290</a>
<b>Gross weight (kg)</b>	<a href="#">7,7</a>
<b>Voltage (V/Hz)</b>	<a href="#">400/50</a>
<b>Power (W)</b>	<a href="#">6900</a>
<b>Water consumption per cycle (l)</b>	<a href="#">2,3</a>
<b>Basket dimensions (mm)</b>	<a href="#">500 x 500</a>
<b>Washing up efficiency (basket/hour)</b>	<a href="#">60</a>
<b>Tank capacity (l)</b>	<a href="#">29</a>
<b>Duration of the cycle (mp)</b>	<a href="#">60/90/120/180</a>
<b>Maximal dish size (mm)</b>	<a href="#">345</a>
<b>Net weight (kg)</b>	<a href="#">69</a>

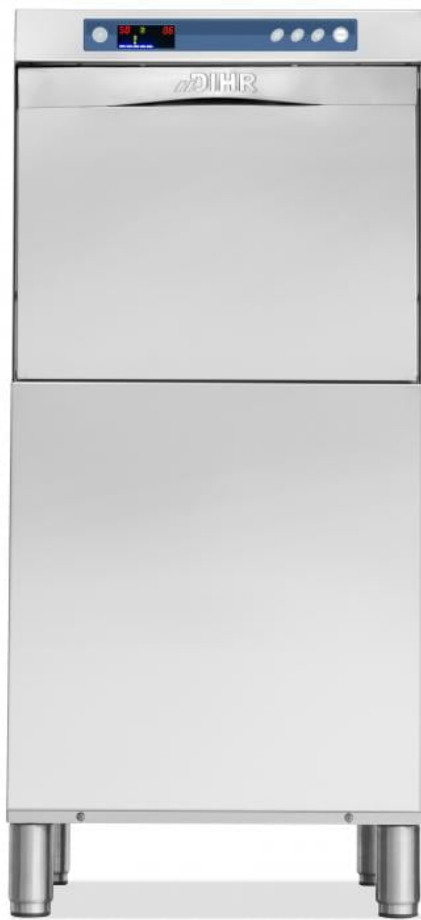

## PRODUCT DESCRIPTION

The GS 85 T single-walled dishwasher with AISI 304 stainless steel exterior and interior, heat- and sound-insulated double-walled door, DIGITAL panel, opening sensor safety microswitch, deep-drawn basin (29.0 liters), uniform system of overflow and drain pipes (triple protection), non-return valve, built-in rinse aid dispenser, "Thermostop" system (rinsing only starts when the water in the boiler reaches 85 ° C), boiler capacity: 5.7 liters, with DIGITAL TOUCH BUTTON control, It has 4 preset washing programs. The display shows the temperature of the water in the boiler and the tank, the number and status of the current washing program, and the error codes in case of a problem. "Soft Start" function for extremely fragile objects (gradually increasing water pressure in the wash and rinse cycles). Sewage outlet without pump (with gravity discharge) Suitable for glasses up to 355 mm high and plates with a diameter of 380 mm. Basket size: 500x500mm. Accessories: 2 baskets (for glasses and plates), 1 cutlery basket. The base unit is available in 400V / 50Hz, but is optionally available in 230V / 50Hz. The use of a water softener is mandatory!

## ADDITIONAL INFORMATION

<b>Weight</b>	77 kg
<b>Dimensions</b>	690 × 670 × 1300 mm
<b>Brand</b>	<a href="#">DIHR</a>
<b>Packaging dimension (Wi)</b>	<a href="#">670</a>
<b>Packaging dimension (De)</b>	<a href="#">690</a>
<b>Packaging dimension (He)</b>	<a href="#">1300</a>
<b>External size (Wi)</b>	<a href="#">590</a>
<b>External size (De)</b>	<a href="#">600</a>
<b>External size (Hi)</b>	<a href="#">1290</a>
<b>Gross weight (kg)</b>	<a href="#">7,7</a>
<b>Voltage (V/Hz)</b>	<a href="#">400/50</a>
<b>Power (W)</b>	<a href="#">6900</a>
<b>Water consumption per cycle (l)</b>	<a href="#">2,3</a>
<b>Basket dimensions (mm)</b>	<a href="#">500 x 500</a>
<b>Washing up efficiency (basket/hour)</b>	<a href="#">60</a>
<b>Tank capacity (l)</b>	<a href="#">29</a>
<b>Duration of the cycle (mp)</b>	<a href="#">60/90/120/180</a>
<b>Maximal dish size (mm)</b>	<a href="#">345</a>
<b>Net weight (kg)</b>	<a href="#">69</a>



